Enterprise NVR

SL-ENVR

PROTECT NVR & STORAGE

3U NVR with (16) 2.5/3.5” drive bays, supporting up to (70) 4K cameras or (210) Full HD cameras.









OVERVIEW

Dimensions	481.4 × 480 × 132 mm (19 × 18.9 × 5.2")
Managed Cameras	(210) HD (140) 2K (70) 4K
Managed Access Hubs	300 *Please note, Reader Pro and Intercom quantities must be below Protect supported camera limits.*
Storage Capacity	(16) 2.5/3.5" drive bays
Data Protection	✓ Yes
Vantage Point	✓ Yes
Networking Interface	(2) 10G SFP+ ports (1) 10 GbE RJ45 port
Power Redundancy	✓ Yes *Dual hot-swappable PSUs*
Form Factor	Rack Mount (3U)

Door Access Support	✓ Yes
Management Application	Protect Access Connect

HARDWARE

Hard Drive Capacity	(16) 2.5/3.5" HDD / SSD support
Max. Power Budget for Drives	310W
Max. Power Consumption	410W
Power Method	(2) AC input, 100–240V, 7A Max., 50/60Hz (Redundant, hot-swappable)
Power Supply	Hot-swappable 550W CRPS
Processor	8-core ARM® at 2.5 GHz
Memory	32 GB
Management	Ethernet
Display	Bezel (Optional)
Weight	Without rails: 16.6 kg (36.6 lb) With rails: 19.5 kg (43.0 lb)
Enclosure Material	SGCC steel
Mount Material	Aluminum
Slide Rails	482.6 mm (19") four-post racks Posts depths ranging from 650 to 1,000 mm (25.6–39.4”)
Faceplate	ENVR Bezel, 3U Bezel, 3U Bezel Lite (Optional)
Ambient Operating Temperature	-5 to 40° C (23 to 104° F)
Ambient Operating Humidity	5 to 95% noncondensing
NDAA Compliant	✓ Yes
Certifications	CE, FCC, IC

PRODUCT DRAWINGS

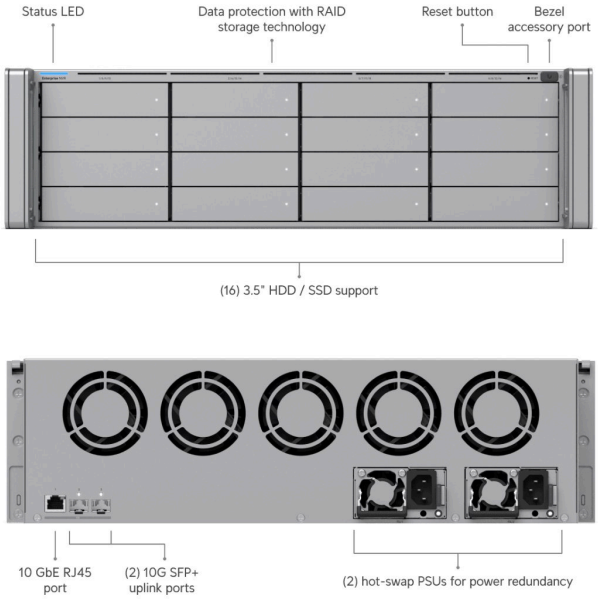

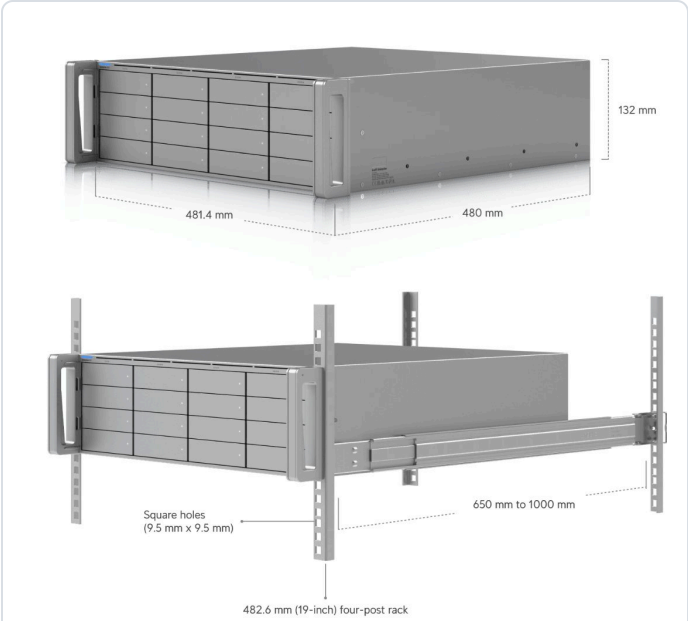

Prepared by Smart Life, LLC. Specifications and product images are provided by the manufacturer as of October 27, 2026 and are subject to change without notice. Product names are trademarks of their respective owners.