E7 Campus

SL-E7-Campus

WIRELESS ACCESS POINT

Enterprise-grade indoor/outdoor access point with 10-stream tri-band WiFi 7 performance, PRISM™ active RF filtering technology, integrated directional antennas, a 10 GbE uplink, and a redundant GbE port for high availability.







OVERVIEW

Dimensions	Device: 250 × 250 × 45.5 mm (9.8 × 9.8 × 1.8") Articulating mount: ø104 × 149.4 (ø4.1 × 5.9")
WiFi Standard	WiFi 7 *With 6 GHz support*
Spatial Streams	10
Coverage Area	465 m² (5,000 ft²)
Max. Client Count	1000+
Uplink	10 GbE 1 GbE
Mounting	Wall, Pole (Mounts Included) VESA (Optional)
Weatherproofing	IPX6 IP67 with Waterproof Door Kit (Included)

Power Method	PoE++

PERFORMANCE

MIMO	
6 GHz	4 × 4 (DL/UL MU-MIMO)
5 GHz	4 × 4 (DL/UL MU-MIMO)
2.4 GHz	2 × 2 (DL/UL MU-MIMO)
Max. Data Rate	
6 GHz	11.5 Gbps (BW320)
5 GHz	8.6 Gbps (BW240)
2.4 GHz	688 Mbps (BW40)
Antenna Gain	
6 GHz	Directional internal: 12 dBi, 90° x 50°
5 GHz	Directional internal: 12 dBi, 100° x 55°
2.4 GHz	Directional internal: 9 dBi, 90° x 80°
Max. TX Power	
6 GHz	30 dBm (36 dBm EIRP)
5 GHz	30 dBm
2.4 GHz	23 dBm
Max. BSSIDs	8 per Radio
Supported Data Rates	
802.11be (WiFi 7)	7.3 Mbps to 11.4 Gbps (MCS0 - MCS13 NSS1/2/3/4, EHT 20/40/80/160/240/320)
802.11ax (WiFi 6)	7.3 Mbps to 4.8 Gbps (MCS0 - MCS11 NSS1/2/3/4, HE 20/40/80/160)
802.11ac (WiFi 5)	6.5 Mbps to 3.4 Gbps (MCS0 - MCS9 NSS1/2/3/4, VHT 20/40/80/160)
802.11n	6.5 Mbps to 600 Mbps (MCS0 - MCS31, HT 20/40)

FEATURES

Wireless Meshing	✓ Yes
Band Steering	✓ Yes
802.11v BSS Transition Management	✓ Yes
802.11r Fast Roaming	✓ Yes
802.11k Radio Resource Management (RRM)	✓ Yes
Zero-Wait DFS	✓ Yes

Advanced Radio Management	✓ Yes
Real-Time Spectral Analysis	✓ Yes *For enhanced channel selection*
Passpoint (Hotspot 2.0)	✓ Yes
Captive Hotspot Portal	
Custom Branding Landing Page	✓ Yes
Voucher Authentication	✓ Yes
Payment-Based Authentication	✓ Yes
External Portal Server Support	✓ Yes
Password Authentication	✓ Yes
Guest Network Isolation	✓ Yes
Private Pre-Shared Key (PPSK)	✓ Yes
WiFi Speed Limiting	✓ Yes
Client Device Isolation	✓ Yes
WiFi Schedules	✓ Yes
RADIUS over TLS (RadSec)	✓ Yes
Dynamic RADIUS-assigned VLAN	✓ Yes

HARDWARE


Max. Power Consumption	44W
Supported Voltage Range	42.5–57V DC
Networking Interface	(1) 10 GbE RJ45 port (1) GbE RJ45 port
PRISM™ RF Filtering	✓ Yes
Weight	Device: 2.2 kg (4.9 lb) With articulating mount: 3.1 kg (6.8 lb)
Wind Loading	164.75 N at 200 km/h (37 lbf at 125 mph)
Pole Mount Diameter	1–2.5" (25–63.5 mm)
Antennas	(1) Internal with directional patterns
Antenna beamwidth	
6 GHz	90° x 50° *Supported for US/CA versions*
5 GHz	100° x 55°
2.4 GHz	90° x 80°
Management	Ethernet


Enclosure Material	UV-stabilized polycarbonate, aluminum alloy
Mount Material	Stainless steel, aluminum alloy
LEDs	
System	R/G/B
Operating Frequency	US/CA: 2400 - 2472 MHz U-NII-1: 5150 - 5250 MHz U-NII-2A: 5250 - 5350 MHz U-NII-2C: 5470 - 5725 MHz U-NII-3: 5725 - 5850 MHz U-NII-5 and U-NII-7: 5925 - 6425 MHz, 6525 - 6875 MHz Worldwide: 2400 - 2483.5 MHz 5150 - 5850 MHz 5925 - 7125 MHz *For worldwide, it depends on the regulatory region*
Ambient Operating Temperature	-30 to 60° C (-22 to 140° F)
Ambient Operating Humidity	5 to 95% noncondensing
NDAA Compliant	✓ Yes
Certifications	FCC, IC

SOFTWARE

Application Requirements	
Network application	Version 9.0.114 and later
Mobile App	iOS™ version 10.20.0 and later Android™ version 10.21.3 and later

PRODUCT DRAWINGS

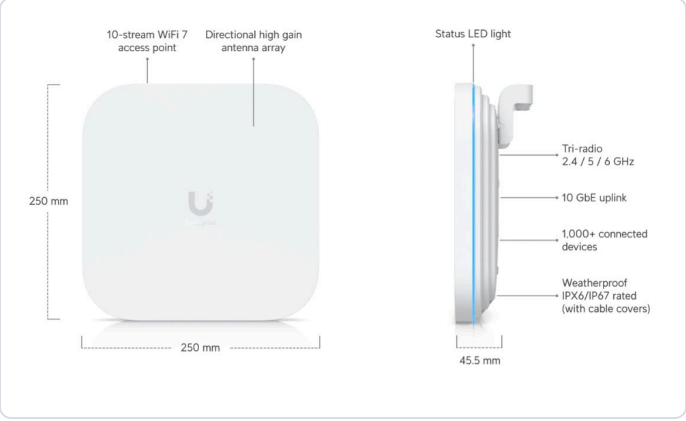

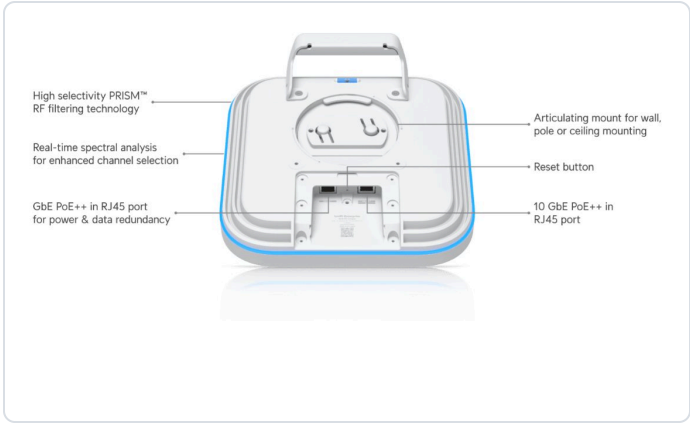

Prepared by Smart Life, LLC. Specifications and product images are provided by the manufacturer as of October 27, 2026 and are subject to change without notice. Product names are trademarks of their respective owners.