# Intercom Viewer

**SL-UA-Intercom-Viewer**

DOOR ACCESS

Display that works with Intercom and Reader Pro for visitor screening and remote access control.

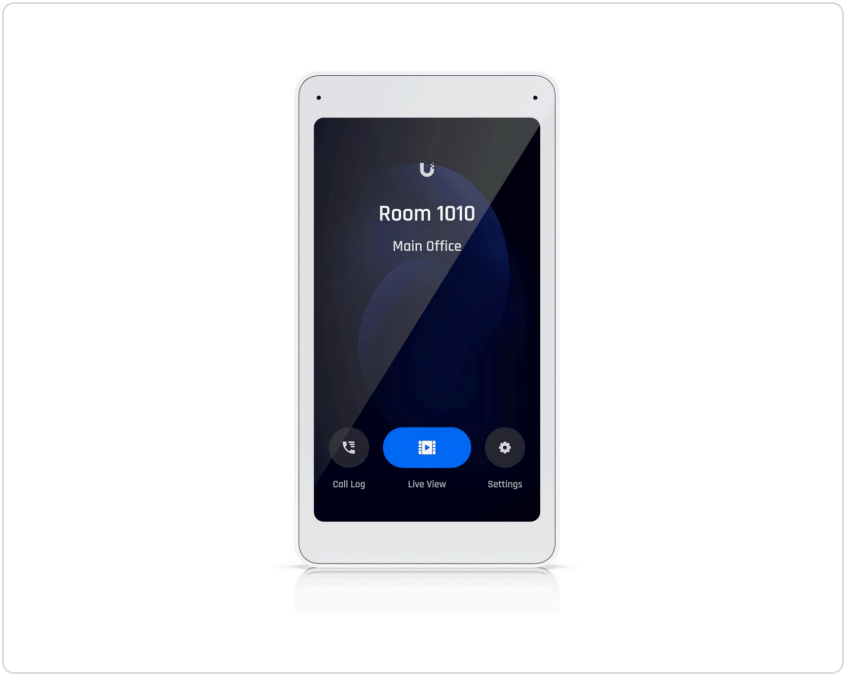


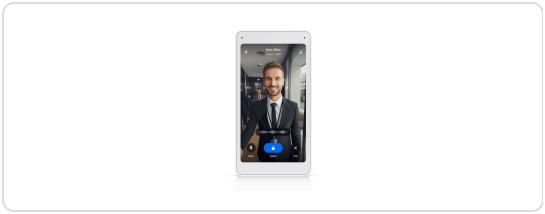

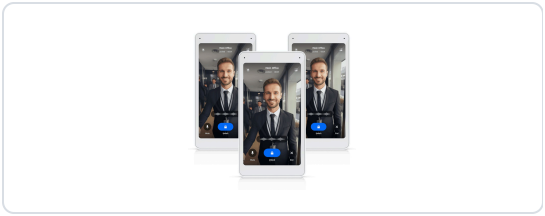

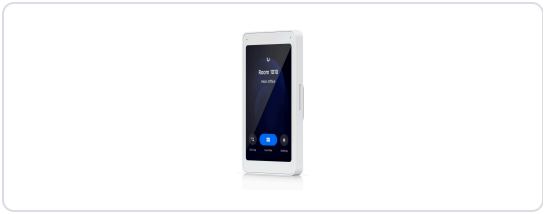

Available as: SL-UA-Intercom-Viewer, SL-UA-Intercom-Viewer-3

## OVERVIEW

| | |
|---|---|
| **Dimensions** | 135 × 72 × 31.8 mm<br>(5.3 × 2.8 × 1.3") |
| **Mobile Unlock** | ✓ Yes |
| **NDAA Compliant** | ✓ Yes |
| **UL 294 Level** | Destructive attack: Level I<br>Line security: Level I<br>Endurance: Level I<br>Standby power: Level I |

## MECHANICAL

| | |
|---|---|
| **Weight** | 168 g (5.9 oz) |
| **Enclosure Material** | Glass, polycarbonate |
| **Mount Material** | Aluminum alloy |

| | |
|---|---|
| **Mounting** | Wall (Included)<br>Gang box mount (Optional) |

## HARDWARE

| | |
|---|---|
| **Indoor and Outdoor Use** | Indoor only |
| **Networking Interface** | (1) 10/100 Mbps RJ45 port |
| **Connectivity** | Ethernet |
| **Power Method** | PoE<br>UL 294 Power-limited Class 2 PSU<br>UL 60950-1/62368-1 LPS/PS2 PSU |
| **Max. Power Consumption** | 5W |
| **Supported Voltage Range** | 44–57V DC |
| **Display** | |
| Size | 127 mm (5") diagonal |
| Luminance | 300 nits (Typical) |
| Screen Orientation | Portrait |
| Resolution | 1280 × 720 px |
| **Microphone** | ✓ Yes |
| **Speaker** | ✓ Yes |
| **Buttons** | (1) Factory reset |
| **PoE Cabling Requirements** | Cat 5e cabling is the minimum performance category recommended. The performance category utilized should match the transmission speed required at the installation site.<br>The minimal conductor gauge permitted to connect between the PSE or power injector and the PD shall be 26 AWG (0.13 $mm^2$ ) for patch cords; 24 AWG (0.21 $mm^2$ ) for horizontal or riser cable. |
| **UL 294 Statement** | Compliance with IEEE 802.3 specifications was not verified as part of UL 294. The equipment is intended to comply with the section of the National Electrical Code, ANSI/NFPA 70, Article 725.121, Power Sources for Class 2 and Class 3 Circuits. |
| **CAN/ULC-60839-11-1 Grade** | Grade assignment: I |
| **Certifications** | CE, FCC, IC, UL 294, CAN/ULC-60839-11-1 |
| **Document number, and issue date and/or revision level** | UA-Intercom-Viewer, V01 |
| **Ambient Operating Temperature** | 0 to 40° C<br>(32 to 104° F) |
| **Ambient Operating Humidity** | 5 to 95% noncondensing |

## SOFTWARE

| | |
|---|---|
| **Management Application** | Access |
| **Software Information** | The software version can be checked in the cloud portal |

## PRODUCT DRAWINGS




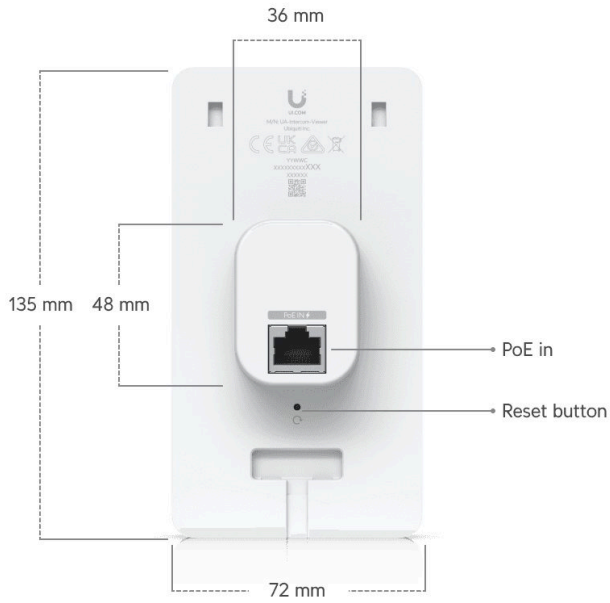


Prepared by Smart Life, LLC. Specifications and product images are provided by the manufacturer as of October 27, 2026 and are subject to change without notice. Product names are trademarks of their respective owners.