AI Multi Sensor 4

SL-UVC-AI-MS-4 PROTECT CAMERA

All-weather PoE++ 32MP multi-sensor camera featuring a Multi-TOPS AI engine, 2.33× optical zoom, 360° IR coverage, and four independently adjustable lenses for seamless wide-area and close-up monitoring.









Available as: SL-UVC-AI-MS-4-B, SL-UVC-AI-MS-4-W

OVERVIEW

Dimensions	ø255 × 105 mm (ø10.04 × 4.13")
IR Night Vision	20 m (65 ft)
Zoom Mode	2.33x Optical
Face Recognition	✓ Yes
License Plate Recognition	✓ Yes
Smart Detections (People, Vehicles, Animals)	✓ Yes
Resolution	32MP
Field of View	Wide: H: 108.8°, V: 57.6° , D: 130.8° Tele: H: 42.8°, V: 24.1° , D: 49.1°
Weatherproofing	IP66

Tamper Resistance	IK10
Mounting	Ceiling mount (Included) Pole, Corner, Arm, Pendant mount (Optional)

PERFORMANCE

Networking Interface	GbE RJ45 port
Video	
Image Settings	Color, brightness, sharpness, contrast, white balance, exposure control, 2DNR, 3DNR, NR by motion, masking, text overlay, HDR
Max. Frame Rate	24 FPS
Resolution	(4) 8MP 3840 × 2160 (16:9)
Optics	
Sensor	1/2.8" 8MP
Lens	(4) F 3.18-7.42 mm; ƒ/1.8-ƒ/2.8
Night Mode	Built-in (16) IR LEDs with adaptive control

HARDWARE

Max. Power Consumption	34.6W
Supported Voltage Range	42.5–57V DC
Power Method	PoE++
Processor	Dual core Arm® Cortex®-A76 based chip
Weight	2.4 kg (5.3 lb)
Enclosure Material	Aluminum alloy, polycarbonate
Mount Material	Powder-coated aluminum alloy
Expansion Slot	(2) MicroSD card (1) M.2. 2280 SATA SSD *SSD card support coming soon*
Button	(1) Factory reset
Ambient Operating Temperature	-20 to 50° C (-4 to 122° F)
Ambient Operating Humidity	0 to 90% noncondensing
NDAA Compliant	✓ Yes
Certifications	CE, FCC, IC

PRODUCT DRAWINGS





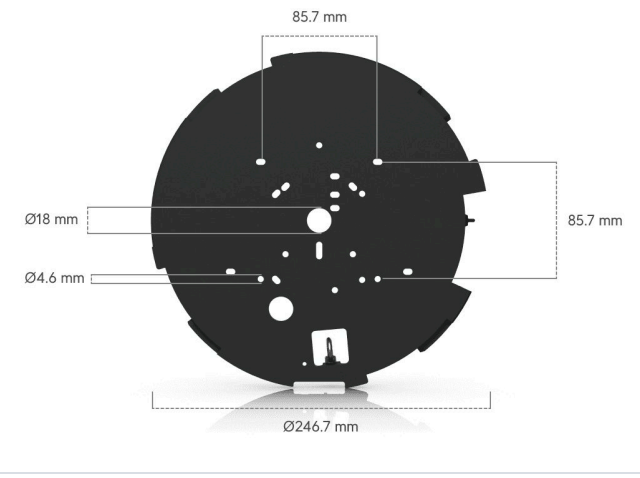



Prepared by Smart Life, LLC. Specifications and product images are provided by the manufacturer as of October 27, 2026 and are subject to change without notice. Product names are trademarks of their respective owners.