G5 Bullet

SL-UVC-G5-Bullet

PROTECT CAMERA

Next-gen indoor/outdoor 2K HD PoE Camera.









Available as: SL-UVC-G5-Bullet, SL-UVC-G5-Bullet-3

OVERVIEW

Dimensions	Without mount: ⌀75.5 × 74.4 mm (⌀3 × 2.9") With mount: ⌀75.5 × 150 mm (⌀3 × 5.9")
IR Night Vision	9 m (30 ft)
Smart Detections (People, Vehicles, Animals)	✓ Yes
Resolution	2K
Field of View	H: 84.4°, V: 45.4°, D: 99.8°
Audio	Microphone
Weatherproofing	IP55
Tamper Resistance	IK04
Mounting	Wall, ceiling, pole mount (Included) Junction box (Optional)

PERFORMANCE

Networking Interface	10/100 MbE RJ45 port
Video	
Image Settings	Color, brightness, sharpness, contrast, white balance, exposure control, 2DNR, 3DNR, NR by motion, masking, text overlay
Max. Frame Rate	30 FPS
Resolution	4MP 2688 × 1512 (16:9)
Optics	
Sensor	5MP CMOS
Lens	Fixed focal length
Night Mode	Built-in IR LED illumination and IR cut filter

HARDWARE

Max. Power Consumption	4W
Supported Voltage Range	37—57V DC
Power Method	PoE
Processor	Dual-core Arm® Cortex®-A7 based chip
Pole Mount Diameter	3/4" (19 mm)
Weight	Without mount: 225 g (8 oz) With mount: 315 g (11.1 oz)
Enclosure Material	Polycarbonate, aluminum alloy
Mount Material	Wall mount: aluminum alloy, polycarbonate Pole mount: aluminum alloy
Button	(1) Factory reset
Ambient Operating Temperature	-20 to 40° C (-4 to 104° F)
Ambient Operating Humidity	0 to 90% noncondensing
NDAA Compliant	✓ Yes
Certifications	CE, FCC, IC

PRODUCT DRAWINGS

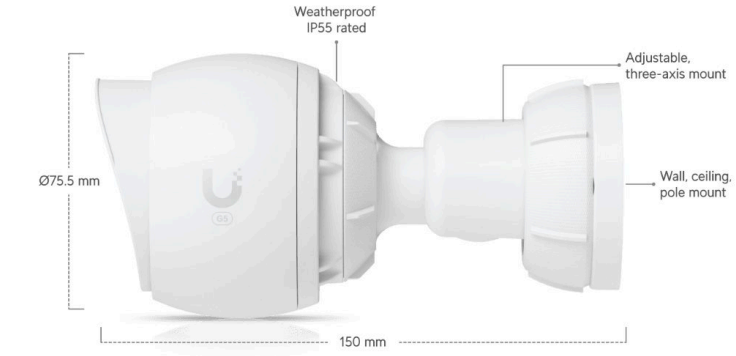



Prepared by Smart Life, LLC. Specifications and product images are provided by the manufacturer as of October 27, 2026 and are subject to change without notice. Product names are trademarks of their respective owners.