G5 PTZ

SL-UVC-G5-PTZ

PROTECT CAMERA

Compact, all-weather camera with ultra-low latency pan-tilt-zoom control and versatile mounting options.









Available as: SL-UVC-G5-PTZ-B, SL-UVC-G5-PTZ

OVERVIEW

Dimensions	Without mount: ⌀90 × 152.5 mm (⌀3.5 × 6") With mount: 90 × 94 × 179.5 mm (3.5 × 3.7 × 7")
IR Night Vision	20 m (65 ft)
Zoom Mode	2x Optical
Smart Detections (People, Vehicles, Animals)	✓ Yes
Resolution	2K
Field of View	Wide: H: 99.7°, V: 51.9°, D: 121° Tele: H: 45.5°, V: 25.4°, D: 52.4°
Pan-Tilt Range	Pan: 350° Tilt: 100°
Audio	Microphone

Weatherproofing	IP66
Tamper Resistance	IK04
Mounting	Wall mount, pole mount (Included) Conduit adapter, surface, in-ceiling, pendant, corner mount (Optional)

PERFORMANCE

Networking Interface	10/100 MbE RJ45 port
Video	
Max. Frame Rate	30 FPS
Resolution	4MP 2688 × 1512 (16:9)
Optics	
Sensor	5MP 1/2.7" CMOS
Lens	F 3.42–6.85 mm; ƒ/1.85–ƒ/2.4
Night Mode	Built-in IR & white LED illumination with IR cut filter

HARDWARE

Max. Power Consumption	14W
Supported Voltage Range	37—57V DC
Power Method	PoE+
Pole Mount Diameter	1.5–2" (38–50 mm)
Weight	Without mount: 580 g (1.3 lb) With mount: 650 g (1.4 lb)
Enclosure Material	Aluminum alloy, polycarbonate
Mount Material	Wall mount: polycarbonate Pole mount: aluminum alloy
Button	(1) Factory reset
Ambient Operating Temperature	-30 to 45° C (-22 to 113° F)
Ambient Operating Humidity	0 to 90% noncondensing
NDAA Compliant	✓ Yes
Certifications	CE, FCC, IC

PRODUCT DRAWINGS

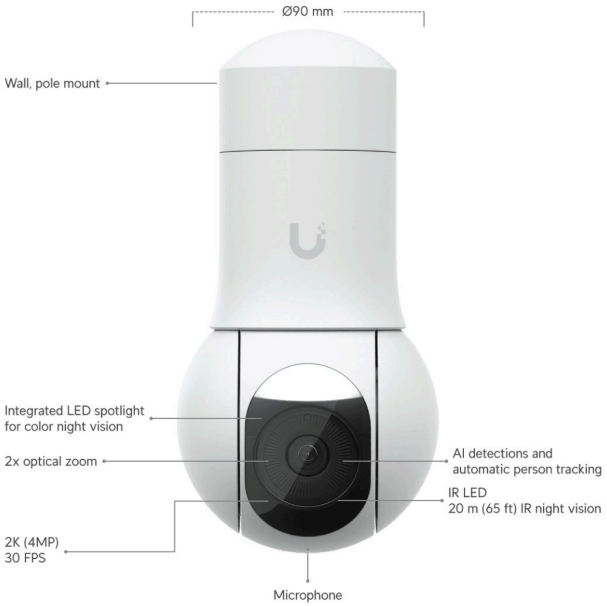





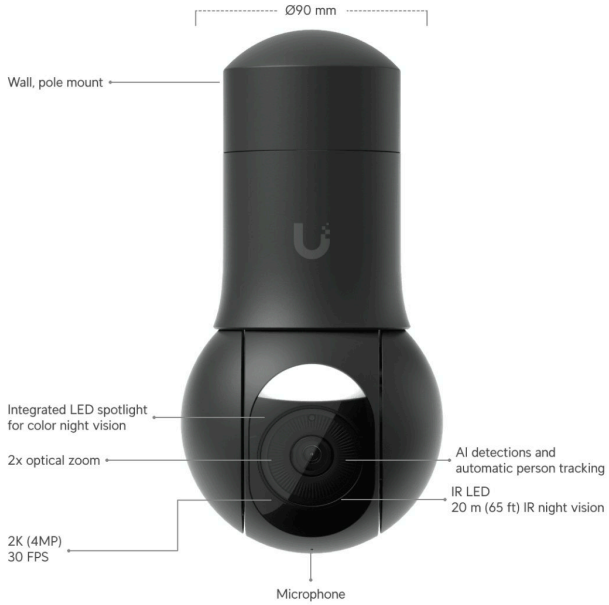

Prepared by Smart Life, LLC. Specifications and product images are provided by the manufacturer as of October 27, 2026 and are subject to change without notice. Product names are trademarks of their respective owners.