G6 Pro Dome

SL-UVC-G6-Pro-Dome PROTECT CAMERA

All-weather vandal-proof 4K PoE+ camera with a Multi-TOPS AI engine, 2.36x optical zoom, and a large 1/1.2" CMOS sensor for exceptional low-light clarity and long-range IR night vision.









Available as: SL-UVC-G6-Pro-Dome-B, SL-UVC-G6-Pro-Dome-W

OVERVIEW

Dimensions	ø163.8 × 108.8 mm (ø6.45 × 4.28")
IR Night Vision	40 m (131 ft)
Zoom Mode	2.36x Optical
Face Recognition	✓ Yes
License Plate Recognition	✓ Yes
Smart Detections (People, Vehicles, Animals)	✓ Yes
Resolution	4K
Field of View	Wide: H: 113.8°, V: 61.9°, D: 134° Tele: H: 45.5°, V: 25.8°, D: 52°
Audio	Microphone

Weatherproofing	IP66
Tamper Resistance	IK10
Mounting	Ceiling, Wall mount (Included) Gang Box Mounting Plate, Camera Dual Mount, Flush Mount, Weather Shield (Optional)

PERFORMANCE

Networking Interface	GbE RJ45 port
Video	
Image Settings	Color, brightness, sharpness, contrast, white balance, exposure control, 2DNR, 3DNR, NR by motion, masking, text overlay, HDR
Max. Frame Rate	30 FPS
Resolution	8MP 3840 × 2160 (16:9)
Optics	
Sensor	1/1.2" 8MP
Lens	F 5.9-13.8 mm; ƒ/1.5-ƒ/2.9
Night Mode	Built-in adaptive IR LED illumination and IR cut filter

HARDWARE

Max. Power Consumption	15W
Supported Voltage Range	42.5–57V DC
Power Method	PoE+
Processor	Quad core Arm® Cortex®-A53 based chip
Weight	1.2 kg (2.6 lb)
Enclosure Material	Aluminum alloy, polycarbonate
Mount Material	Stainless steel
Expansion Slot	MicroSD card
Button	(1) Factory reset
Ambient Operating Temperature	-20 to 50° C (-4 to 122° F)
Ambient Operating Humidity	0 to 90% noncondensing
NDAA Compliant	✓ Yes
Certifications	CE, FCC, IC

PRODUCT DRAWINGS

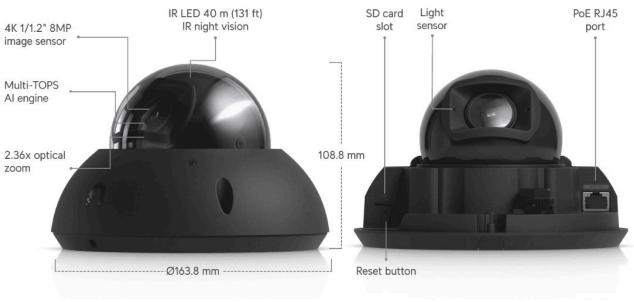



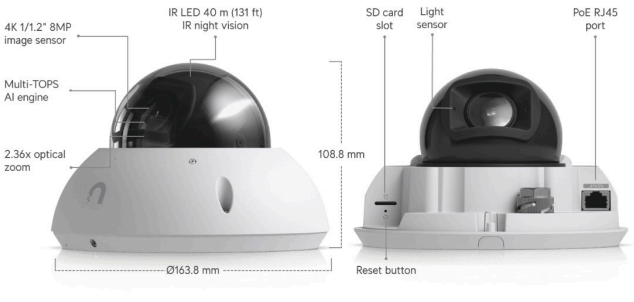



Prepared by Smart Life, LLC. Specifications and product images are provided by the manufacturer as of October 27, 2026 and are subject to change without notice. Product names are trademarks of their respective owners.