Analog Telephone Adapter

SL-UT-ATA VOIP PHONE

Easy-to-deploy adapter for managing analog telephones and fax machines with Talk.









OVERVIEW

Dimensions	131.5 × 110.7 × 28.2 mm (5.2 × 4.4 × 1.1")
Application Suite	
Talk	✓ Yes *Plug-and-play VoIP system with advanced call routing and automations for seamless communication.*
Mounting	Flat/Angle Mount
Telephone Features	Voicemail, DND, caller ID, Call Transfer, Call Waiting, 3-Way Conference

MECHANICAL

Weight	300 g (10.6 oz)
Enclosure Material	Polycarbonate

HARDWARE

Connectivity	(1) 100 MbE RJ45 port/PoE (1) 3.5 mm (0.14") headset port (2) RJ11 FXS ports (1) USB-C (power input) 802.11a/b/g/n/ac WiFi 2.4G b/g/n, BW 20 WiFi 5G a/n/ac, BW 20/40/80
Power Method	USB-C 5V DC, 1A PoE 48V DC, 0.35A
Power Supply	5V DC, 1A power adapter, 1.5 m cord (Included) PoE (pair B 4, 5+; 7, 8-)
Memory	RAM: 128 Mb Storage: 256 Mb
Display	
Size	86 mm (3.4") diagonal
Resolution	192 × 64 dots
Buttons	(3) Device Control Keys
Ambient Operating Temperature	0 to 40° C (32 to 104° F)
Ambient Operating Humidity	10 to 90% noncondensing
Certifications	FCC, IC, CE
NDAA Compliant	✓ Yes

SOFTWARE

Supported phone lines	2
Voice Codec	G.711 u/a
Fax Over IP	Fax Pass-Through using G.711
Management Application	
Talk	Version 1.12.0 and later

PRODUCT DRAWINGS

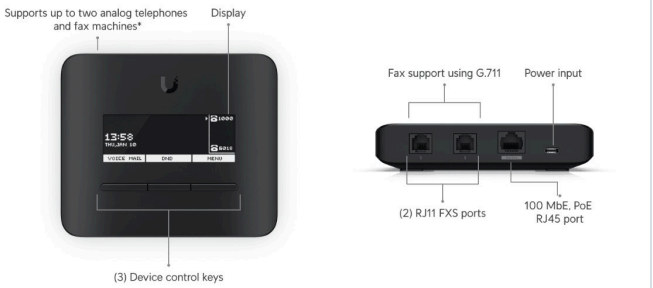

* Compatibility of other analog devices (e.g., fire alarm systems) is not guaranteed.



Prepared by Smart Life, LLC. Specifications and product images are provided by the manufacturer as of October 27, 2026 and are subject to change without notice. Product names are trademarks of their respective owners.