Red Reader

ProdataKey · Model RGPBV2

A high-security single-gang card reader, second generation. It reads cards, fobs and phones, and connects over OSDP for an encrypted link back to the controller.





Access granted



With keypad

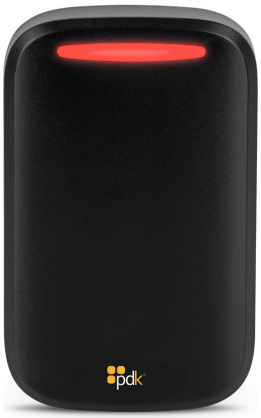

The V2 family

Features

- Reads 125 kHz prox and 13.56 MHz high-security credentials
- Bluetooth for mobile credentials on a phone
- Secure OSDP connection to the controller
- Redesigned body and chassis for a simpler install
- Also made as a mullion reader and with a keypad

Specifications

Form factor	Single gang
Credential types	125 kHz, 13.56 MHz, Bluetooth BLE
Controller connection	OSDP
Voltage	5 to 24 V DC
Operating temperature	-31 to 150 °F
Dimensions	5.25 x 3.29 x 0.73 in
Protection rating	IP65
Certifications	FCC, IC, CE, UL 294
Color	Black
Other versions	Mullion, mullion keypad, single-gang keypad